



GENERAL DETAILS

- Rack dimensions: **50x60 cm**
- Total weight: 198 Kg
- Washing cycles / racks/hour: 60"- 120"-180"-9'/60-30-20-7
- Possibility of automatic start of washing cycle by closing the hood
- Upper and lower rotating wash/rinse arms with stainless steel tube
- Wash pump: 1.300 W
- Boiler capacity: 40 lt
- Tank capacity: 30 lt
- Boiler heating elements:: 9,0 kw
- Tank heating elements:: 4,5 kw
- Water quantity per cycle: 2,5 lt
- Electronic controls with LCD display
- Useful washing height: 415 mm
- Magnetic hood microswitch
- Automatic filling of water
- Double electric detergent and rinse aid dispenser
- Hot rinse
- Thermostop function
- Vertical self-cleaning washing pump
- PRS System (Atmospheric Boiler +break tank)
- ES System (Energy Saving System)
- Self-cleaning cycle at the end of the day

WATER FILTRATION

- Pre-filtering of tank water by means of no. 1 stainless steel filter
- Single wash pump filter, easily removable

BODY

- AISI 304 stainless steel body
- Double skinned insulated body
- Preformed wash tank with rounded corners
- Hood opening system with springs
- Removable upper and lower wash/rinse arms for easy cleaning
- Boiler in AISI 316 stainless steel

EQUIPMENT

- 2 racks 50x60 cm, 22 plates
- 1 glass rack 50x60 cm
- 2 cutlery baskets
- 1 inlet hose (2 m lenght)
- 1 drain hose (2 m lenght)

OPTIONALS

- Hot water filling
- HD Version (P.Tot. 14,8 kW, 380-415V3N~ only)
- 60 Hz version
- Kit drain pump
- Kit remote control system

ACCESSORIES FOR WATER TREATMENT

- Integrated water softener unit ("S" model)

ACCESSORIES

- Entry / exit tables in stainless steel
- Pre-wash tables in stainless steel
- Special baskets

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided


WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.1MPa (1 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 25°C

TECHNICAL SPECIFICATIONS

- Voltage: **380-415V3N / 220-240V3~50Hz**
- Total power: **10,3 Kw**
- Amperage: **15 A /26 A**
- Power cord supply size: **5x4 mmq**

HK 60E ES

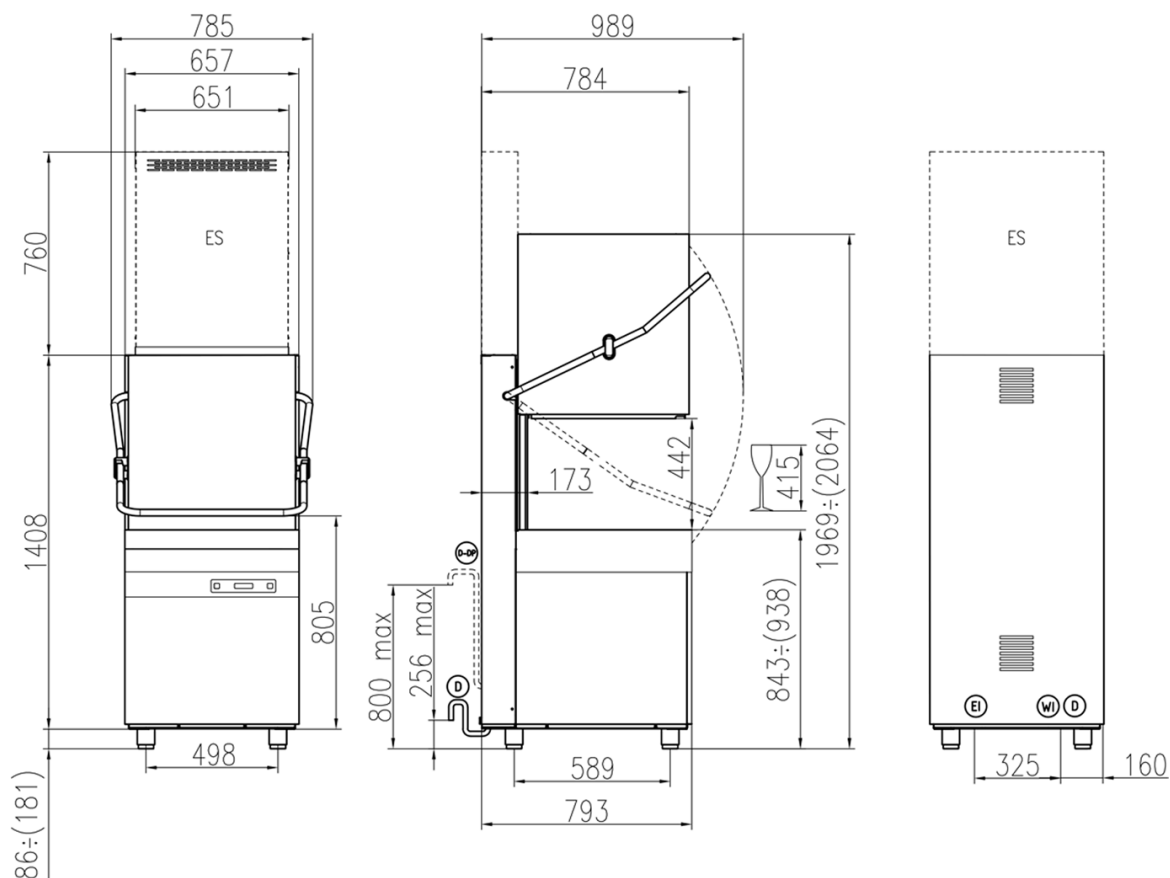

- (EI) CAVO DI ALIMENTAZIONE
POWER CORD SUPPLY
CABLE D'ALIMENTATION
CABLE DE ALIMENTACION
- (WI) CANNA DI CARICO G 3/4 L=2000 mm
G 3/4 INLET HOSE L=2000 mm
TUYAU D'ALIMENTATION G 3/4" L=2000 mm
TUBO DE ALIMENTACION G 3/4" L=2000 mm
- (D) TUBO DI SCARICO ø 40 mm L=2000 mm
DRAIN HOSE ø 40 mm L=2000 mm
TUYAU DE VIDANGE ø 40 mm L=2000 mm
TUBO DE DESAGUE ø 40 mm L=2000 mm
- (D-DP) TUBO DI SCARICO ø 29 mm L=2500 mm (CON POMPA SCARICO)
DRAIN HOSE ø 29 mm L=2500 mm (WITH DRAIN PUMP)
TUYAU DE VIDANGE ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)
TUBO DE DESAGUE ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

Min 10°C-MAX 50°C
Min 10°C-MAX 25°C with ENERGY RECOVERY
200÷500kPa(2÷5 Bar)
100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
HARDNESS 5÷20f-2.8÷11'd