



## TECHNICAL DATA SHEET

Mod. UK 55/80E ES

### GENERAL FEATURES

- Rack size 56.5x69 cm
- Gross weigh: 248 Kg
- Washing cycle/racks/hour: 2'-3'-6'-9' / 30-20-10-7
- Stainless steel wash and rinse arms
- Wash pump: 1,5 Kw
- Boiler capacity: 11 liters
- Tank capacity: 65 litri
- Boiler heating element: 6 Kw
- Tank heating element: 6 Kw
- Water quantity per cycle: 3,5 liters
- Electronic controls LCD display
- Useful washing height: 800 mm
- Magnetic door microswitch
- Automatic water filling
- Double electric detergent and rinse dispenser
- Hot rinse
- Thermostop function
- Self cleaning vertical pump
- PRS system (Atmospheric Boiler+Break tank)
- ES system (Energy saving)
- Green Function for energy saving
- Automatic end-of-day self cleaning of water

### FILTRATION

- Pre-filtering of the tank water by means of no. 1 stainless steel filter equipped with collection basket
- Stainless steel pump filter, easily removable

### BODY

- AISI 304 stainless steel Body
- Doubler skinned insulated body
- Door handle in s/s
- Preformed wash tank AISI 316
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 316

### EQUIPMENT AS GLASSWASHER

- 1 stainless steel rack 56.5x69 cm
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2 m)

### OPTIONAL

- Drain pump
- HD version (P.Tot. 13,5 kW, solo in 380-415V3N ~)

### ACCESSORIES FOR WATER TREATMENT

- Integrated water softener unit ("S" model)

### ACCESSORIES

- Stainless steel special tray holders

### INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

### MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided


### WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 25°C

### TECHNICAL SPECIFICATIONS

- Voltage: **380-415V3N~ 50 Hz/220-240V3~50Hz**
- Total power: **7,5 kW**
- Amperage: **11 A / 19 A**
- Power cord supply size: **5 x 4 mmq**

**UK 55/80E ES**

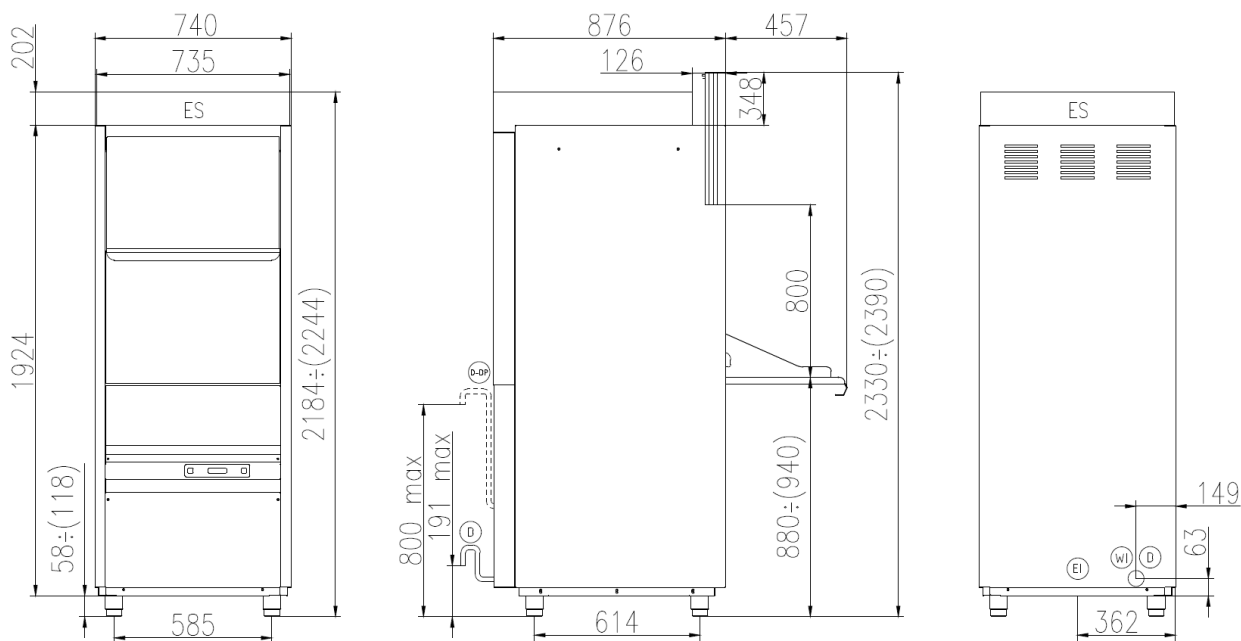

(EI)

CAVO DI ALIMENTAZIONE  
POWER CORD SUPPLY  
CABLE D'ALIMENTATION  
CABLE DE ALIMENTACION

(WI)

CANNA DI CARICO G 3/4 L=2000 mm  
G 3/4 INLET HOSE L=2000 mm  
TUYAU D'ALIMENTATION G 3/4" L=2000 mm  
TUBO DE ALIMENTACION G 3/4" L=2000 mm

(D)

TUBO DI SCARICO Ø 40 mm L=2000 mm  
DRAIN HOSE Ø 40 mm L=2000 mm  
TUYAU DE VIDANGE Ø 40 mm L=2000 mm  
TUBO DE DESAGUE Ø 40 mm L=2000 mm

(D-DP)

TUBO DI SCARICO Ø 29 mm L=2500 mm (CON POMPA SCARICO)  
DRAIN HOSE Ø 29 mm L=2500 mm (WITH DRAIN PUMP)  
TUYAU DE VIDANGE Ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)  
TUBO DE DESAGUE Ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5±20°f-2.8±11°d