



GENERAL FEATURES

- Rack size **56.5x69 cm**
- Gross weight: 193,5 Kg
- Washing cycle/racks/hour:
2'-3'-6'-9'/30-20-10-7
- Stainless steel wash and rinse arms
- Wash pump: 1,5 Kw
- Boiler capacity: 11 litri
- Tank capacity: 65 litri
- Boiler heating element: 6 Kw
- Tank heating element: 6 Kw
- Water quantity per cycle: 3,5 litri
- Electronic controls LCD display
- Useful washing height: 650 mm
- Magnetic door microswitch
- Automatic water filling
- Double electric detergent and rinse dispenser
- Hot rinse
- Thermostop function
- Self cleaning vertical pump
- PRS system (Atmospheric Boiler+Break tank)
- Green Functom for energy saving
- Automatic end-of-day self cleaning of water

FILTRATION

- Removable plastic pump filter in several sections
- Stainless steel surface filters

BODY

- AISI 304 stainless steel Body
- Double skinned insulated body
- Preformed wash tank in AISI 316 s
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 304

EQUIPMENT AS GLASSWASHER

- 1 stainless steel 56.5x69 cm with wheels
- 1 inlet hose (length 1,5 m)
- 1 drain hose (length 2 m)

OPTIONAL

- Drain pump
- Hot water filling
- 60 Hz version
- HD version (P.Tot. 13,5 kW, 0380-415V3N ~only)

ACCESSORIES FOR WATER TREATMENT

- Integrated water softener unit ("S" model)

ACCESSORIES

- Stainless steel special tray holders

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided


WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

TECHNICAL SPECIFICATIONS

- Voltage: **380-415V3N~ 50 Hz/220-240V3~50Hz**
- Total power: **7.5 kW**
- Amperage: **11 A / 19 A**
- Power cord supply size: **5 x 4 mmq**

UK 55/65E PRS

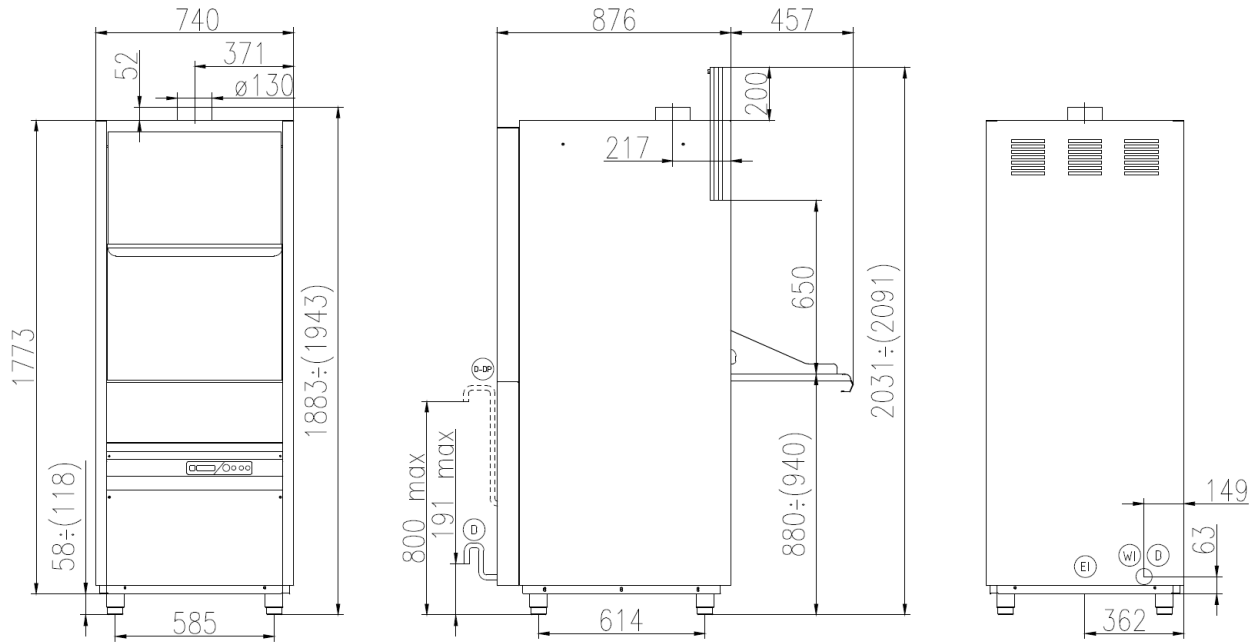

- (EI)** CAVO DI ALIMENTAZIONE
POWER CORD SUPPLY
CABLE D'ALIMENTATION
CABLE DE ALIMENTACION
- (WI)** CANNA DI CARICO G 3/4 L=2000 mm
G 3/4 INLET HOSE L=2000 mm
TUYAU D'ALIMENTATION G 3/4" L=2000 mm
TUBO DE ALIMENTACION G 3/4" L=2000 mm
- (D)** TUBO DI SCARICO ø 40 mm L=2000 mm
DRAIN HOSE ø 40 mm L=2000 mm
TUYAU DE VIDANCE ø 40 mm L=2000 mm
TUBO DE DESAGUE ø 40 mm L=2000 mm
- (D-DP)** TUBO DI SCARICO ø 29 mm L=2500 mm (CON POMPA SCARICO)
DRAIN HOSE ø 29 mm L=2500 mm (WITH DRAIN PUMP)
TUYAU DE VIDANCE ø 29 mm L=2500 mm (AVEC POMPE DE VIDANCE)
TUBO DE DESAGUE ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

SPEC	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
P	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
f d	HARDNESS 5÷20°f-2.8÷11°d