

**GENERAL FEATURES**

- Rack size **40x40 cm**
- Gross weight: 42,5 Kg
- Washing cycles/racks/hour: 90"-120"-180"-9'/40-30-20-7
- Bottom wash/rinse arm
- Top rinse arm
- Wash pump: 190 W
- Boiler capacity: 3 liters
- Tank capacity: 12 liters
- Boiler heating element: 2,7 kW
- Tank heating element: 2,4 kW
- Water consumption per cycle: 2 liters
- Electronic controls with display LCD
- Useful washing height: 300 mm
- Magnetic door microswitch
- Automatic water filling
- Double electric detergent and rinse dispenser
- Hot rinse
- Thermostop function
- Anti back-flow valve
- Green Functom for energy saving
- Automatic end-of-day self cleaning of water

**FILTRATION**

- Plastic wash pump filter, easily removable

**BODY**

- AISI 304 stainless steel Body
- Partial double skinned body
- Preformed wash tank
- Preformed rack guides
- Double skinned door
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 304
- PVC protection rear the bottom front panel

**EQUIPMENT AS GLASSWASHER**

- 2 glass racks 40x40 cm
- 1 cutlery small basket
- 1 insert for saucers
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2,5 m)

**OPTIONAL**

- Drain pump
- Cold rinse
- Hot water filling
- 60 Hz version
- Kit surface filters
- Kit 4 high feet
- Kit booster pump

**ACCESSORIES FOR THE WATER TREATMENT**

- Internal water softener ("S" version)

**ACCESSORIES**

- Special racks (Round, diam. cm 40)
- S/S Supporting stand h. 550 mm for basket

**INSTALLATION**

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

**MAIN POWER SUPPLY**

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided




**WATER SUPPLY CONNECTION**

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C






**TECHNICAL SPECIFICATIONS**

- Voltage: **220-240 V ~ 50 Hz**
- Total power: **2,89 kW**
- Amperage: **13 A**
- Power cord supply size: **3 x 1,5 mmq**
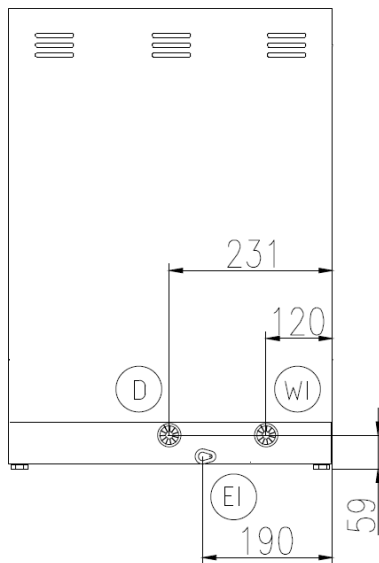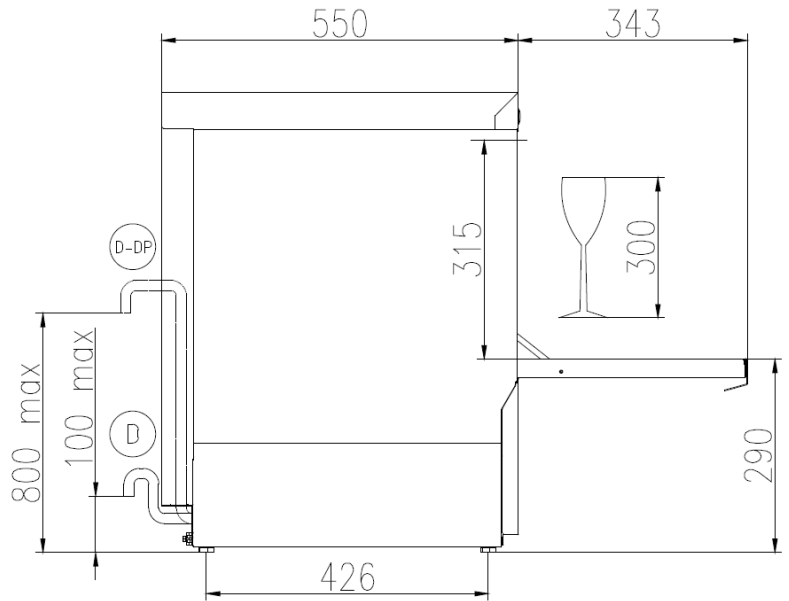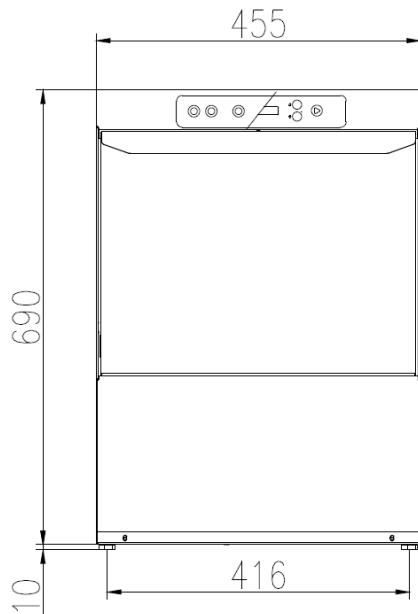
## FK 40E



- EI
 CAVO DI ALIMENTAZIONE  
 POWER CORD SUPPLY  
 CABLE D'ALIMENTATION  
 CABLE DE ALIMENTACION
  
- WI
 CANNA DI CARICO G 3/4 L=2000 mm  
 G 3/4 INLET HOSE L=2000 mm  
 TUYAU D'ALIMENTATION G 3/4" L=2000 mm  
 TUBO DE ALIMENTACION G 3/4" L=2000 mm
  
- D
 TUBO DI SCARICO Ø 29 mm L=2500 mm  
 DRAIN HOSE Ø 29 mm L=2500 mm  
 TUYAU DE VIDANGE Ø 29 mm L=2500 mm  
 TUBO DE DESAGUE Ø 29 mm L=2500 mm
  
- D-DP
 TUBO DI SCARICO Ø 29 mm L=2500 mm (CON POMPA SCARICO)  
 DRAIN HOSE Ø 29 mm L=2500 mm (WITH DRAIN PUMP)  
 TUYAU DE VIDANGE Ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)  
 TUBO DE DESAGUE Ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5÷20*f-2.8÷11*d